



## SOLENOID VALVES FOR IRRIGATION / SPRINKLER SYSTEM

शेती व ठिबक सिंचना करिता वापरला जाणारा सॉलेनॉईड वॉल्व

मॉडेल – R-641A



1-1/2" चा सॉलेनॉईड वॉल्व  
फ्लो अँडजेस्टर सह



3/4" चा सॉलेनॉईड वॉल्व  
फ्लो अँडजेस्टर सह



1" चा सॉलेनॉईड वॉल्व

### सामान्य वर्णन

हा वॉल्व अतिशय कमी प्रेशर असतानाही चालणारा, उपयुक्त असा, जास्त फ्लो देणारा वॉल्व आहे.

हा वॉल्व पाण्यासाठी योग्य आहे.

पाणी कचरा विरहित असणे गरजेचे आहे.

पाईप जोडणी पध्दत –BSP-F आहे.

तापमान क्षमता – (-5°C) ते 80°C (हायड्राईल डायफ्राम).


कॉईल्स उपलब्धता – M22-SQ-WP67/H

220/240 V AC 50 Hz किंवा 12/24 V DC.

टिप – फ्लो अँडजेस्टर ही ऑरेंजमेंट मागितल्यावर मिळते.

### SPECIFICATIONS:

Series	Size G'thr	Orifice Size	Flow Factor Kv	Body Material	Seat	BTP bar	Working Pr.(bar)		Coil Type	Coil Rating		Constr. Ref. No	Weight kgs
							230V AC	24V DC		VA	Watt		
641A	Inch	mm	M <sup>3</sup> /hr.				min	max		~	=		
15	½	15	4	PA 6	HYT	10	0	6	M 22-SQ	9.4	2.6	611	0.275
20	¾	20	5.2	PA 6	HYT	10	0	6	M 22-SQ	9.4	2.6	611	0.275
25	1	25	8.6	PA 6	HYT	10	0	6	M 22-SQ	9.4	2.6	611	0.296
35	1½	35	17.3	PA 6	HYT	10	0	6	M 22-SQ	9.4	2.6	611	0.773
50	2	50	30.5	PA 6	HYT	10	0	6	M 22-SQ	9.4	2.6	611	0.844

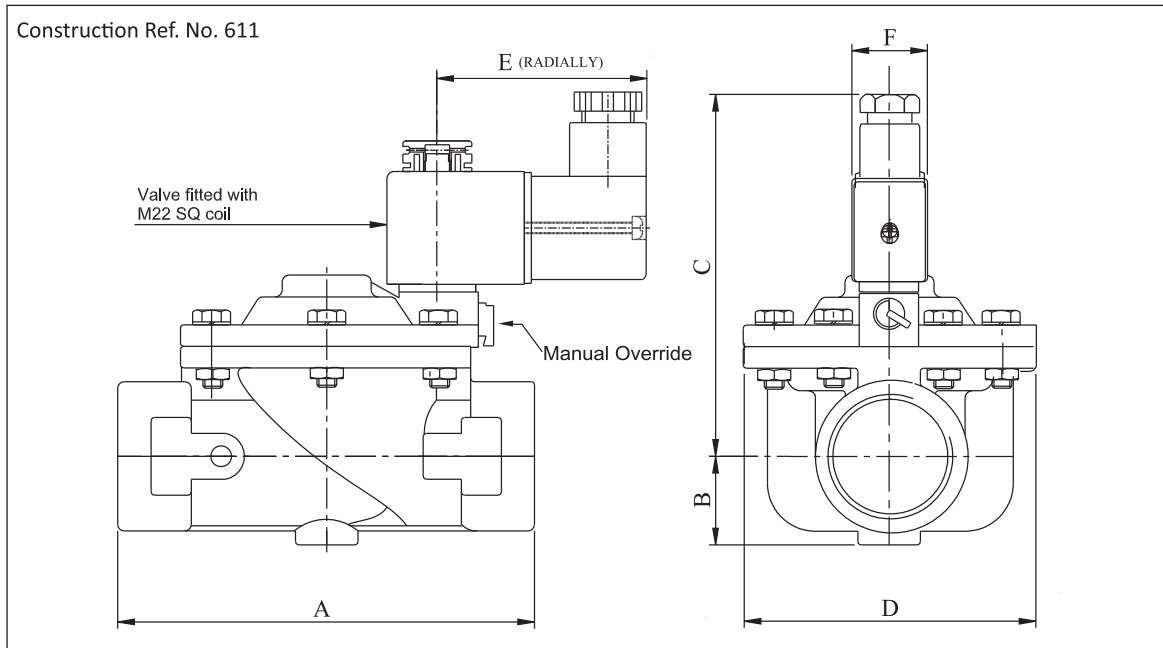

### DIMENSION TABLE

CATALOGUE NO.	Size (Inch)	DIMENSION IN MM.						APPROX WT. (kgs)
		A	B	C	D	E	F	
641A - 15	½	110	20	88	81	50	22	0.275
641A - 20	¾	110	20	88	81	50	22	0.275
641A - 25	1	110	22	88	81	50	22	0.296
641A - 35	1½	162	30	110	126	50	22	0.773
641A - 50	2	172	37	110	126	50	22	0.844

### How to read the catalogue:

641A   15   PA6   BN/V   BSP/NPT

- Series 2-way Normally Closed, Direct Acting Type
- Size of valve/ Port size.
- Body material (PA6)
- Seating material (Hytrel)
- End Connection (BSP / NPT)

### Coil Voltage:

M22   SQ   H-9.4/6   WP-67

- Size of Coil.
- Coil Type (Square)
- Coil VA (AC) or Watts (DC)
- Class of Electrical Protection.

110V   50Hz   AC/DC

- Electrical Voltage, Std. 230, 110, 24 AC / 24 V DC / 12V DC
- Hertz
- Characteristics (AC / DC)