



Manual Diaphragm Valve

6227F (Forged)



Key Features

- ASME BPE Complaint design
- Non-Magnetic Design
- SIP 500 rated life Durability
- Non raising design
- Excellent drainability
- Stroke Restrictor
- Traceability documents
- Pore & Crack free

Applications

- CIP/SIP skids
- PW & WFI skids
- Water distribution & generation
- Bio reactors/Fermenters
- Chromatography skids
- Process distribution

Reference Standard

Design Standard	ASME BPE
Testing Standard	EN :12266-1
Surface Finish	ASME BPE SF:2.4 -1
Conformity Standard	EN :10204

Top Work

Hand Wheel	Plastic PA6 GF 30% (Autoclavable) / Stainless steel (Optional) - CF8/SS-304
Bonnet	ASTM A351CF8 (SS-304)
Visual Indicator	Open/Close

Elastomer/Polymer


Diaphragm Compliance	USP CLASS VI Biological Reactivity
	Test In Vitro and In Vivo
	US FDA CFR177.2600 (EPDM)
	US FDA CFR177.1550 (PTFE)

Valve Construction

Valve Body	ASTM A182 F (SS-316L)
Body Pressure Rating	16Bars
Surface Finish	Internal : 0.2 to 0.4 Ra; External : 0.8Ra
End Connections	Triclamp (TC) as per BS 4825 /ASME BPE

Process Parameters

Service	Air/Water/Steam/Slightly aggressive fluid
Working Temperature	For EPDM : (-) 10 °C to 90 °C for liquid upto 120 °C for Steam
	For PTFE : (-) 10 °C to 155 °C
Working Pressure	10 Bar

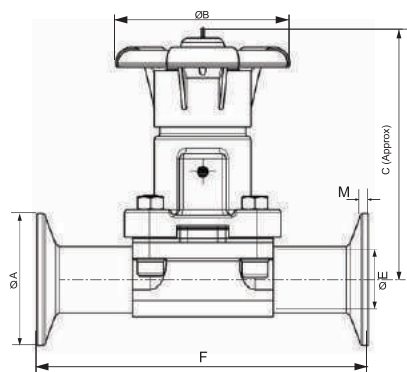

Valve Model No.		Size		Flow Kv	Pressure	Drain Angle	Weight	Dimensions					
EPDM	PTFE/EPDM	INCH	MM	M ₃ Hr	Kg/cm2	°	Kgs	A	B	C	E	F	M
6227F167/E/TC	6227F167/TE/TC	1/2"	15	3.5	10.0	20°	0.8	25	65	76.0	9.4	112	2.85
6227F217/E/TC	6227F217/TE/TC	3/4"	20	5.0	10.0	21.5°	0.8	50.5	65	97	15.75	117	2.85
6227F267/E/TC	6227F267/TE/TC	1"	25	12.5	10.0	21.5°	0.9	50.5	65	97	22.1	127	2.85
6227F417/E/TC	6227F417/TE/TC	1 1/2"	40	36.0	10.0	25°	2	50.5	128	140.0	34.8	146	2.85
6227F517/E/TC	6227F517/TE/TC	2"	50	42.0	10.0	30°	2.4	63.9	128	148.0	47.5	159	2.85
6227F667/E/TC	6227F667/TE/TC	2 1/2"	65	53.0	6.0	31.5°	3.65	77.4	128	165	60.2	190	2.85
6227F817/E/TC	6227F817/TE/TC	3"	75	63.0	6.0	31.5°	10.5	90.9	200	250	68.9	270	2.85

13

WESTERN

Mumbai
Plot No. 65, Road No. 13,
MIDC Marol, Andheri (East),
Mumbai - 400 093
Tel.No.: 022-6915 6100 / 83909 17431
E-mail: acplmumbai.sales@avconcontrols.com

Pune
Plot No. T - 108, MIDC Bhosari,
Pune - 411 026.
Maharashtra (INDIA).
Tel.No.: 020-2712 0776 / 2712 0540
E-mail: acplmumbai.sales@avconcontrols.com

Baroda
307, Mangaldeep Complex,
Sampatras Colony, Productivity Road,
Baroda - 390 005
Tel.No.: 022-6915 6100 / 83909 17431
E-mail: acplmumbai.sales@avconcontrols.com

EASTERN

Kolkata
720, 7th Floor, 33/1, N.S. Road,
Marshall House, Kolkata-700 001.
Tel.No.: 033-4068 1180 / 77109 00889
E-mail: acplmumbai.sales@avconcontrols.com

SOUTHERN

Chennai
249, First Floor, Tiny Sector
Ambattur Industrial Estate,
Chennai - 600 058
Tel.No.: 044-4807 4107 / 089393 12809
E-mail: acplmumbai.sales@avconcontrols.com

Hyderabad
SSR ENCLAVE, Plot No. 81, Road No.4,
Vasanth Nagar, Nizampet X Roads
(Near JNTU College Metro Station.)
Hyderabad - 500085
Tel.No.: 7995086416
E-mail: acplmumbai.sales@avconcontrols.com

Bangalore
Tel.No.: 084312 56574
E-mail: acplmumbai.sales@avconcontrols.com

NORTHERN

New Delhi
Unit No. 708, 7th Floor, 94
Meghdoot, Nehru Place,
New Delhi - 110019
Tel.No.: 011-42639736 / 88282 69844
E-mail: acplmumbai.sales@avconcontrols.com

avcon[®]

Manufactured by:

AVCON CONTROLS PVT. LTD.

Plot No. 65, Road No.13, MIDC Marol,
Andheri (East), Mumbai - 400 093 (INDIA).
Phone : +91-22-6915 6100.

E-mail : avcon@avconcontrols.com
acplmumbai.sales@avconcontrols.com
Website : www.avconcontrols.com