

2/2 Way Pneumatic Piston Operated Normally Open, Angle Seated Valves,

With Cylinder Actuator for On-Off Application
FLANGED DESIGN.

DATA SHEET
PV-6622E/6623E/6624E/6625EXX5
FLG

SPECIFICATIONS

Sizes	: 15 mm (1/2") to 80 mm (3")
CONSTRUCTION	
Body and Bonnet	: Investment casted ASTM-A, 351CF8 (St.St. 304) CF8M St.St. 316) & CF3M (St.St.316L).
Pressure Temperature Rating	: As per ANSI class 150.
End Connections	: Flanged to ANSI Class 150
Seating	: Soft seated Teflon
Optional	: Viton/EPDM/Buna Nitrile.
Leakage	: As per FCI 70-2, Teflon seating class IV. For other soft seating class VI Drop Tight/ Bubble Tight.
Trim	: S.S. AISI 304/316.
Stem Packing	: Self adjusting, Spring loaded Teflon packing.
Characteristics	: On-Off, Normally Closed.
Working Fluid Pressure	: Refer to table below.
Working Temperature	: On steam-continuous 155°C Intermittent 180°C with Teflon seating, Buna Nitrile 80°C, EPDM 135°C, VITON 180°C.

ACTUATOR

Spring return type, Pneumatic Cylinder.	
Cylinder Cover	: S.S. AISI 304(deep drawn)
Cylinder Flange	: Pressure die casted, Aluminium Silicon alloy, solution treated and hard anodised.
Piston	: Steel (deep drawn).
Piston Packing	: Buna Nitrile.
Actuator Spring	: IS 4454 Grade III, duly painted.
Actuator Working Signal Pressure	: 3.5 to 5.5 bar, (Refer to Graph).
Operating Cycles per	: 15mm, 20mm, 25mm upto 600 hour cy/hr. 30mm to 80mm upto 500 cy/hr. (tested on Air, on other fluids, this figure may vary). For 65mm and 80mm upto 300 Cy/hr.




Life Expectancy	:Over one million cycles (lab tested in ideal condition).
Air Quality	:Dry, filtered instrument grade.
Maximum Operating Pressure Differential	:Refer to graph.
Accessory	: Position indicating limit switch box, solenoid valve, filter regulator gauge. Other accessories available on application.
Application	: For control of air, water, oil, gas, steam in textile, power generation, paper & pulp, chemical, petro chemical industries, PSA nitrogen system, air dryer, gas generator and others.
Back Pressure	:All models Max. back pressure 2.5 bar.
Instruction Manual	:Refer to IM 6622E/6623E/6625E.

SPECIFICATION TABLE



Catalogue Number	Size		orifice	flow Factor	Maximum	INLET	Safe Working	Actuator	Air
	BSP (F)		Size	Kv	Working Pressure	POSITION	Pressure	Type	Consumption
	Inch	mm	mm	m ³ /hr	bar		bar	Cy	litres/cy
6622E 155	1/2	15	16	4.3	16	FTC	16	70	0.150
6622E 205	3/4	20	16	5.4	16	FTC	16	70	0.150
6622E 255	1	25	23	13.6	16	FTC	16	70	0.160
6622E 305	1 1/4	30	34	31.8	15	FTC	16	70	0.172
6622E 355	1 1/2	35	34	31.8	15	FTC	16	70	0.172
6622E 505	2	50	45	54.5	6	FTC	16	70	0.184
6622E 655	2 1/2	65	65	70	12	FTC	18	130	0.772
6622E 805	3	80	76	89	12	FTC	18	130	0.772
NORMALLY OPEN - (FLOW TO OPEN, I.E. FLOW UNDER THE SEAT)									
6623E 155	1/2	15	16	4.3	16	FTO	16	70	0.150
6623E 205	3/4	20	16	5.4	16	FTO	16	70	0.150
6623E 255	1	25	23	13.6	10	FTO	16	70	0.160
6623E 305	1 1/4	30	34	31.8	8	FTO	16	70	0.160
NORMALLY OPEN - (FLOW TO CLOSE, I.E. FLOW OVER THE SEAT)									
6624E355	1 1/2	35	34	31.8	16	FTC	16	100	0.329
6624E505	2	50	45	54.5	10	FTC	16	100	0.329
NORMALLY OPEN - (FLOW TO OPEN, I.E. FLOW UNDER THE SEAT)									
6625E 355	1 1/2	35	34	31.8	12	FTO	16	100	0.329
6625E 505	2	50	45	54.5	10	FTO	16	100	0.329
6625E 655	2 1/2	65	65	70	5	FTO	18	130	0.772
6625E 805	3	80	76	89	5	FTO	18	130	0.772

DIMENSIONS (IN MM)

Model	SIZE		FTF	L2	L1	d	D	E	FT	NH	HD	P	OD	C	A
	Inch	mm													
6622E155	1/2	15	130	25	105	21.3	103.5	15	11.6	4	15.8	60.3	90	157	182
6622E205	3/4	20	150	37	113	26.9	103.5	20	13.2	4	15.8	69.9	100	162	187
6622E255	1	25	160	32	128	33.7	103.5	25	14.7	4	15.8	79.4	110	180	209
6622E305	1 1/4	30	180	41	140	42.4	103.5	32	16.3	4	15.8	88.9	115	226	265
6622E355	1 1/2	35	200	47	153	48.3	103.5	40	17.9	4	15.8	98.4	125	226	270
6622E505	2	50	230	71	159	60.3	103.5	50	19.5	4	19.05	120.7	150	230	277
6622E655	2 1/2	65	290	52	238	64	178	55.5	22.7	4	19.05	139.7	180	370	395
6622E805	3	80	310	57.5	252.5	76.2	178	68.2	24.3	4	19.05	152.4	190	393	435
6623E155	1/2	15	130	25	105	21.3	103.5	15	11.6	4	15.8	60.3	90	157	182
6623E205	3/4	20	150	37	113	26.9	103.5	20	13.2	4	15.8	69.9	100	162	187
6623E255	1	25	160	32	128	33.7	103.5	25	14.7	4	15.8	79.4	110	180	209
6623E305	1 1/4	30	180	40	140	42.2	103.5	38.2	16.3	4	15.8	88.9	115	180	265
6624E355	1 1/2	35	200	47	153	48.3	138	40	17.9	4	15.8	18.4	125	230	270
6624E505	2	50	230	71	154	60.3	138	50	19.5	4	19.5	120.7	150	230	277
6625E355	1 1/2	35	200	47	153	48.3	103.5	40	17.9	4	15.8	98.4	125	226	270
6625E505	2	50	230	71	159	60.3	103.5	50	19.5	4	19.05	120.7	150	230	277
6625E655	2 1/2	65	290	52	238	64	178	55.5	22.7	4	19.05	139.7	180	370	395
6625E805	3	80	310	57.5	252.5	76.2	178	68.2	24.3	4	19.05	152.4	190	393	435


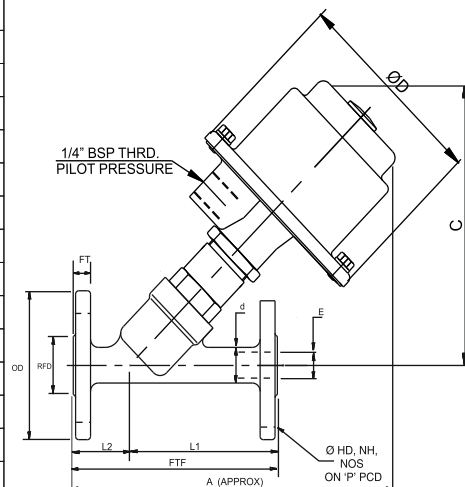


6623E/6625E

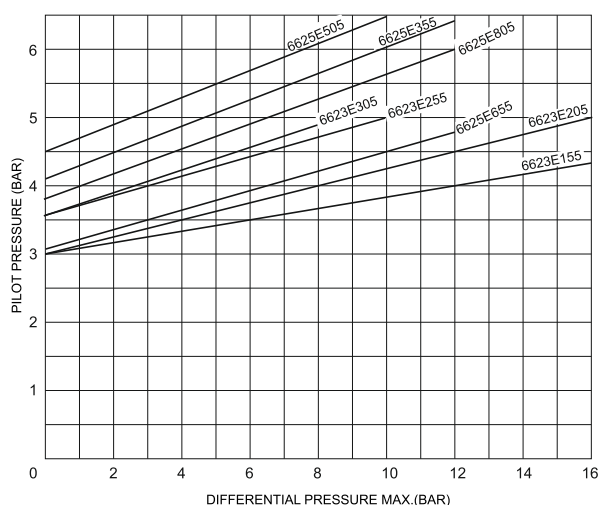

NORMALLY OPEN-FLOW TO OPEN PLUG
CAT. NO. 6623E/6625E
(FTO)

6622E/6624E

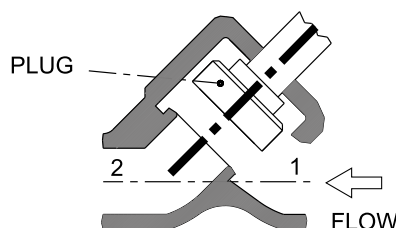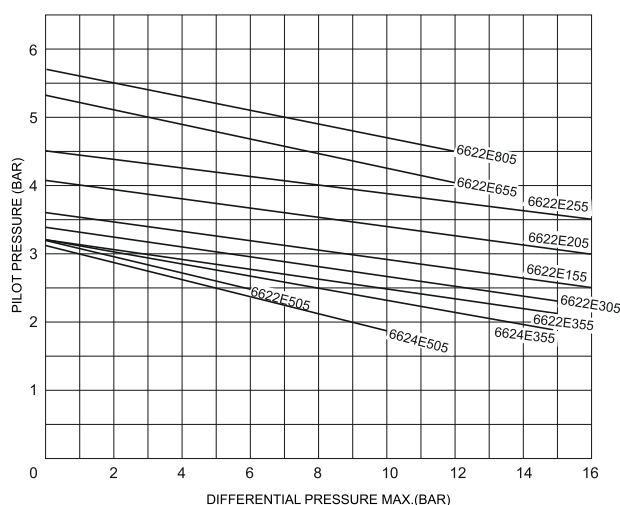

NORMALLY OPEN-FLOW TO CLOSE PLUG
CAT. NO. 6622E / 6624E
(FTC)

Note:

Technical specifications, details & dimensions are subject to change without prior notice.
Dimensions in the table are approximate subject to final confirmation by AVCON.

WESTERN

Mumbai
Plot No. 65, Road No. 13,
MIDC Marol, Andheri (East),
Mumbai - 400 093
Tel.No. : 022-6915 6100 / 83909 17431
E-mail : acplmumbai.sales@avconcontrols.com

Pune
Plot No. T - 108, MIDC Bhosari,
Pune - 411 026
Maharashtra (INDIA).
Tel.No. : 020-2712 0776 / 2712 0540
E-mail : acplmumbai.sales@avconcontrols.com

Baroda
307, Mangaldeep Complex,
Sampatna Colony, Productivity Road,
Baroda - 390 005.
Tel.No. : 022-6915 6100 / 83909 17431
E-mail : acplmumbai.sales@avconcontrols.com

SOUTHERN

Chennai
249, First Floor, Tiny Sector
Ambattur Industrial Estate,
Chennai - 600 058
Tel.No. : 044-4807 4107 / 089393 12809
E-mail : acplmumbai.sales@avconcontrols.com

Hyderabad
SSR ENCLAVE, Plot No. 81, Road No.4,
Vasanth Nagar, Nizampet X Roads
(Near JNTU College Metro Station),
Hyderabad - 500065.
Tel.No. : 7995086416
E-mail : acplmumbai.sales@avconcontrols.com

Bangalore
Tel.No. : 084312 56574
E-mail : acplmumbai.sales@avconcontrols.com

EASTERN

Kolkata
720, 7th Floor, 33/1, N.S. Road,
Marshall House, Kolkata- 700 001.
Tel.No. : 033-4068 1180 / 77109 00889
E-mail : acplmumbai.sales@avconcontrols.com

NORTHERN

New Delhi
Unit No. 708, 7th Floor, 94
Meghdoot, Nehru Place,
New Delhi - 110019
Tel.No. : 011-42639736 / 88282 69844
E-mail : acplmumbai.sales@avconcontrols.com

Manufactured by:

AVCON CONTROLS PVT. LTD.

Plot No. 65, Road No.13, MIDC Marol,
Andheri (East), Mumbai - 400 093 (INDIA).
Phone : +91-22-6915 6100.

E-mail : avcon@avconcontrols.com

acplmumbai.sales@avconcontrols.com

Website : www.avconcontrols.com