

2/2 -Way Force Lift Type, Solenoid Valves


9230E - Normally Closed, Energised to Open,

9232E - Normally Open, Energised to Close.

DATA SHEET
9230E
9232E


SPECIFICATIONS

Sizes	: 3/8" (10 mm) to 2" (50 mm).
End Connections	: Standard-G-ISO-228(BSP-F), Optional-NPT.
Body Material	: SS ASTM A351 Gr.CF8/CF8M.
Body Test Pressure	: 40 Bar (Refer to table below).
Max.Wkg.Pressure	: 6 Bar (Refer to table below).
Seat Material	: Std. : Buna Nitrile, Optional - Viton, Neoprene, EPDM.
Core Tube Nut	: St.St.304 / St.St.316.
Plunger/Stopper	: St.St.430FR.
Spring	: St.St.302.
Shading Ring	: Copper. Optional: Silver for corrosive media.
Temp.(ambient)	: 42Deg.C
Max.Wkg.Temp.	: (-)5 to 80Deg.C.
Voltage (AC)	: 230, 110, 48, 24 V - 50/60 Hz.
(DC)	: 24, 110, 240 V.
Enclosures	: General Purpose (IP20). Weatherproof- RD-WP-67. Flameproof-RD-FLP-IIC+WP67.
Approvals	: KLPL/PESO/CE/ATEX/BIS.
Differential Pr.	: 0 to 6 bar (Refer to table below).
Coil Insulation	: Class 'H' upto 155Deg.C.
Fluids	: Air,Water,Gas, Mild vacuum,Light oil, mild corrosive fluid, etc.
Manual Override	: Available only for 9230E-Normally Closed Valve. Not available for 9232E-Normally Open Valve.
Sales Point	: High volume flow, low pressure application.
Application	: Gas burning equipment, Autoclaves, Oil centrifuge plants, Mild vacuum plants, Pump seal water application, Low pressure water circulation system, solar heating system, gas generator and others.
Mounting	: In horizontal pipeline, keeping solenoid upright and vertical.
Note	: 1) Use of Filter in the inlet side is highly recommended. 2) Not suitable for back pressure from outlet side.

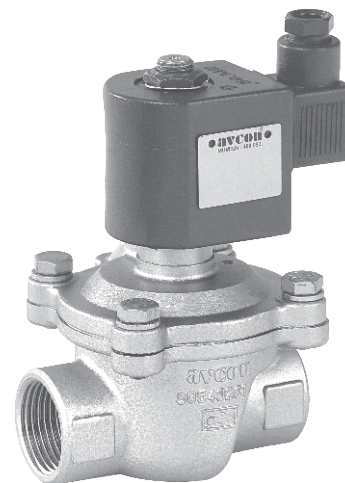

SPECIFICATION TABLE

2/2 WAY NORMALLY CLOSED / NORMALLY OPEN



Catalogue Number	Pipe Size	Orifice Size	Flow Factor Kv	Minimum Pressure	Maximum Operating Pressure (bar)						BTP	Material		Constr. Ref.	VA Rating	Watt Rating	Coil	Housing
					AC			DC										
	Inch	mm	M³/hr.	bar	Air/Gas	Water	Light Oil	Air/Gas	Water	Light Oil		bar	Body		Seat	AC	DC	
9230E104 9232E104	3/8	16	2.6	0	6	4	3	6	5	3	40	CF8	BN	167	36	22	M50	SQ
9230E154 9232E154	1/2	16	3.4	0	6	4	3	6	5	3	40	CF8	BN	167	36	22	M50	SQ
9230E204 9232E204	3/4	19	4.3	0	6	3.5	3	6	4	3	40	CF8	BN	167	36	22	M50	SQ
9230E254 9232E254	1	25	8.6	0	6	3.5	2	6	4	2.5	40	CF8	BN	167	36	22	M50	SQ
9230E304 9232E304	1-1/4	28	14.6	0	5	3.5	2	5	4	2	40	CF8	BN	167	36	22	M50	SQ
9230E354 9232E354	1-1/2	34	17.3	0	5	3	2	5	4	2	40	CF8	BN	167	36	22	M50	SQ
9230E504 9232E504	2	45	30.5	0	4	3	2	4	3	2	40	CF8	BN	167	36	22	M50	SQ


ELECTRICAL REFERENCE

Coil Type	Power Consumption & Watt Rating			Class of Insulation	Protection	Certification Standard
	AC		DC			
	VA Inrush	VA Holding	Watts			
M 50 SQ	50	36	22	H	GP/WP IP-67	IS/IEC 60529-2001
M 50 RD	50	36	22	H	GP/WP IP-67	IS/IEC 60529-2001
M 50 FLP IIC	50	36	22	H	FLP-IIC IP-67	IS/IEC 60079-1-2014


DIMENSIONS IN (MM)

Catalogue Number	Pipe Size	Constr. Ref.	A	B	C	D	Weight (Approx.)
	Inch						Kgs. ◇
9230/9232E104	3/8	167	65	14.5	119	72	1.12
9230/9232E154	1/2	167	65	14.5	119	72	1.12
9230/9232E204	3/4	167	80	26	124	80	1.495
9230/9232E254	1	167	95	27	129	96	1.65
9230/9232E304	1 1/4	167	100	30	138	101	2.275
9230/9232E354	1 1/2	167	118	34	144	102	2.38
9230/9232E504	2	167	137	42	154	133	3.715


CONSTRUCTION REF. NO.: 167

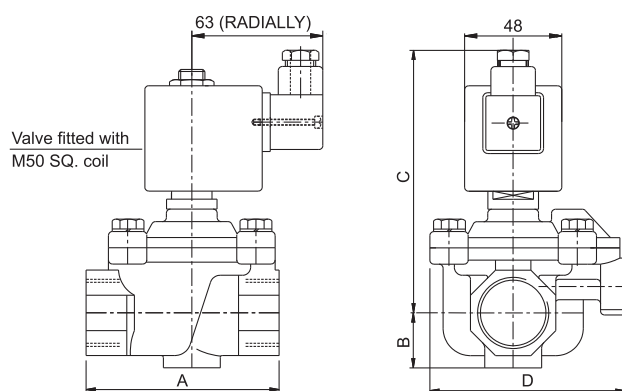


Valve fitted with M50 RD GP coil -
General purpose enclosure as per IP-20

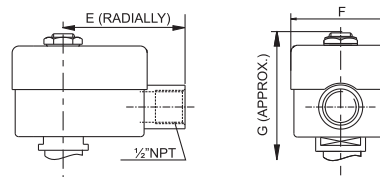

Valve fitted with M50 RD WP coil -
Waterproof metallic enclosure as per IS/IEC 60529-2001 IP-67

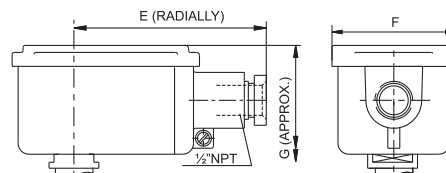

Valve fitted with M50 FLP IIC coil - Flameproof
metallic enclosure as per IS/IEC 60079-1-2014 IP-67.

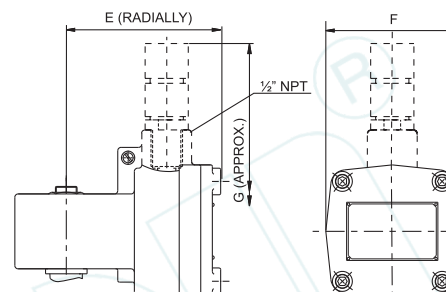

Catalogue Number	Pipe Size	Constr. Ref.	E (RADIALLY)			F			G (APPROX.)		
	Inch		RD GP	RD WP	FLP	RD GP	RD WP	FLP	RD GP	RD WP	FLP
9230/9232E104	3/8	167	66	96	96	57	68	80	110	115	180
9230/9232E154	1/2	167	66	96	96	57	68	80	110	115	180
9230/9232E204	3/4	167	66	96	96	57	68	80	115	120	185
9230/9232E254	1	167	66	96	96	57	68	80	120	125	190
9230/9232E304	1 1/4	167	66	96	96	57	68	80	129	134	199
9230/9232E354	1 1/2	167	66	96	96	57	68	80	135	140	205
9230/9232E504	2	167	66	96	96	57	68	80	145	150	215

◇ Weight with SQ enclosure only, ask AVCON for other weights.

Ed.9230E/9232E-Dec-2025

Note:

Technical specifications, details & dimensions are subject to change without prior notice.
Dimensions in the table are approximate subject to final confirmation by AVCON.

Page No. 226

WESTERN Mumbai Plot No. 65, Road No. 13, MIDC Marol, Andheri (East), Mumbai - 400 093 Tel.No.: 022-6915 6100 / 83909 17431 E-mail : acplmumbai.sales@avconcontrols.com			Pune SSR ENCLAVE, Plot No. 81, Road No.4, Vasanth Nagar, Nizampet X Roads (Near JNTU College Metro Station), Hyderabad - 500085 Tel.No.: 020-2712 0776 / 2712 0540 E-mail : acplmumbai.sales@avconcontrols.com			Baroda 307, Mangaldeep Complex, Sampatna Colony, Productivity Road, Baroda - 390 005. Tel.No.: 022-6915 6100 / 83909 17431 E-mail : acplmumbai.sales@avconcontrols.com		
SOUTHERN Chennai 249, First Floor, Tiny Sector Ambattur Industrial Estate, Chennai - 600 058 Tel.No.: 044-4807 4107 / 089393 12809 E-mail : acplmumbai.sales@avconcontrols.com			Hyderabad SSR ENCLAVE, Plot No. 81, Road No.4, Vasanth Nagar, Nizampet X Roads (Near JNTU College Metro Station), Hyderabad - 500085 Tel.No.: 020-2712 0776 / 2712 0540 E-mail : acplmumbai.sales@avconcontrols.com			Bangalore Tel.No.: 084312 56574 E-mail : acplmumbai.sales@avconcontrols.com		

EASTERN Kolkata 720, 7th Floor, 33/1, N.S. Road, Marshall House, Kolkata- 700 001. Tel.No.: 033-4068 1180 / 77109 00889 E-mail : acplmumbai.sales@avconcontrols.com			NORTHERN New Delhi Unit No. 708, 7th Floor, 94 Meghdoot, Nehru Place, New Delhi - 110019 Tel.No.: 011-42639736 / 88282 69844 E-mail : acplmumbai.sales@avconcontrols.com		
--	--	--	--	--	--

avcon®
Manufactured by:

AVCON CONTROLS PVT. LTD.

Plot No. 65, Road No.13, MIDC Marol,
Andheri (East), Mumbai - 400 093 (INDIA).
Phone : +91-22-6915 6100.

E-mail : avcon@avconcontrols.com
acplmumbai.sales@avconcontrols.com
Website : www.avconcontrols.com