

High Pressure Regulators For Air & Gas

FEATURES

- All metal construction with Nylon inserted Anti viking Perbunan Diaphragm for Gas, Buna Nitrile for Air. No Gland Packing.
- Non protruding type adjustments Spindle with thrust bearing fitted for ease of spring adjustments.
- Protective cap and locking arrangement which disables unauthorized tampering with the set pressure.
- Internal impulse drilling.
- Also available with External impulse line with vibration damping valve for greater accuracy in outlet pressure.
- Constant set pressure, (+/-5% of the set range), irrespective of change in inlet pressure and flow.
- Solid steel construction designed to API Standard.

CONSTRUCTION

- Valve Body : Cast Steel to ASTM A 216
- Body & Spring Chamber : Cast Steel to ASTM A 216 Gr. WCB
- Spring : As per IS 4454 Gr. III
- Spindle : Series 400. Burnished & hard chrome plated
- Plug : Stainless Steel 304
- Seat : Soft Seat Teflon (Single Seated)
- Diaphragm : Calendered sheet Nylon inserted Perbunan/ Buna Nitrile
- End Connection : Screwed to BSP/ NPT (F) or Externally Screwed Flanges to ANSI B 16. 5, Class 150/300 RF
- Working Temperature : (-)15° C to (+) 80° C
- Inlet Pressure : 3 to 10 bar (For RG XX R 100)
6 to 20 bar (For RG XX R 200)
- Leakage : Class VI on Shut- off
- Fluids : Natural Gas, LPG in gaseous form, Town Gas, Biogas, Air.
- Set Pressure Range :

Type	RG XX R 100	RG XX R 200
A	0.4 to 4.0 bar	0.4 to 4.0 bar
B	1.5 to 5.0 bar	1.5 to 5.0 bar
C	3.0 to 8.5 bar	3.0 to 8.5 bar
D		5.5 to 12.0 bar
HIGHER SET PRESSURE RANGE IS AVAILABLE		

OPERATING PRINCIPLE

The regulation takes place by means of a spring force by moving the diaphragm and the stem against the gas pressure flowing through the regulator, below the diaphragm assembly. The outlet pressure can be varied by means of adjusting the spring force.


The design offers constant set pressure (± 5 % of the set point) irrespective of change in inlet pressure and inlet flow.

Also available with external impulse line with vibration damping valve to achieve greater accuracy in outlet pressure.




DIMENSIONAL DETAILS

Model	Size		Dimensions				Approx Weight Kgs.
	Inches	mm	A	B	C	OD	
RG 15 R 100 RG 15 R 200	1/2"	15	156	84	340	204	18.0
RG 20 R 100 RG 20 R 200	3/4"	20	156	84	340	204	17.7
RG 25 R 100 RG 25 R 200	1"	25	156	84	340	204	17.5
RG 35 R 100 RG 35 R 200	1 1/2"	35	216	95	395	254	34.5
RG 50 R 100 RG 50 R 200	2"	50	216	95	395	254	34.0

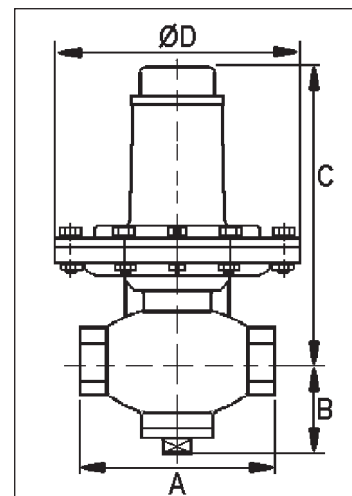

VOLUMETRIC FLOW DIAGRAM

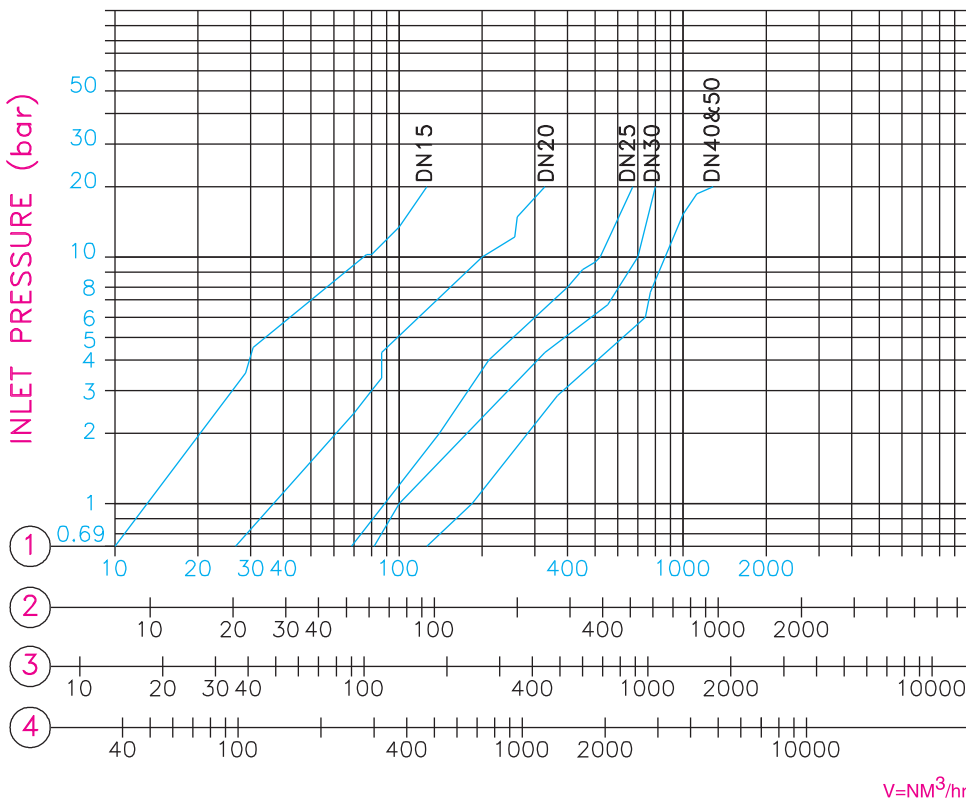

PRESSURE RATIO LP : HP	CAPACITY FACTOR "W"
0.96	2.5
0.94	2.0
0.92	1.8
0.91	1.7
0.89	1.6
0.88	1.5
0.86	1.4
0.83	1.3
0.79	1.2
0.73	1.1
0.58	1.0

When the downstream pressure (LP) is greater than half of the upstream pressure (HP), the maximum flow rate required should be multiplied by a capacity factor "W" obtained by the above table.

SPECIFIC GRAVITY :

- ① Natural Gas = 0.62
- ② Town Gas = 0.45
- ③ LP Gas = 1.56
- ④ Air = 1.00

Note:

Technical specifications and dimensions are subject to change without prior notice. Dimensions in the table are approximate subject to final confirmation by AVCON.

WESTERN		
Mumbai Plot No. 65, Road No. 13, MIDC Marol, Andheri (East), Mumbai - 400 093 Tel.No.: 022-6915 6100 / 83909 17431 E-mail: acplmumbai.sales@avconcontrols.com	Pune Plot No. T - 108, MIDC Bhosari, Pune - 411 026. Maharashtra (INDIA). Tel.No.: 020-2712 0776 / 2712 0540 E-mail: acplmumbai.sales@avconcontrols.com	Baroda 307, Mangaldeep Complex, Sampat Rao Colony, Productivity Road, Baroda - 390 005. Tel.No.: 022-6915 6100 / 83909 17431 E-mail: acplmumbai.sales@avconcontrols.com
SOUTHERN		
Chennai 249, First Floor, Tiny Sector Ambattur Industrial Estate, Chennai - 600 058 Tel.No.: 044-4807 4107 / 089393 12809 E-mail: acplmumbai.sales@avconcontrols.com	Hyderabad SSR ENCLAVE, Plot No. 81, Road No.4, Vasanth Nagar, Nizampet X Roads (Near JNTU College Metro Station.) Hyderabad - 500085. Tel.No.: 795086416 E-mail: acplmumbai.sales@avconcontrols.com	Bangalore Tel.No.: 084312 56574 E-mail: acplmumbai.sales@avconcontrols.com

EASTERN	
Kolkata 720, 7th Floor, 33/1, N.S. Road, Marshall House, Kolkata - 700 001. Tel.No.: 033-4068 1180 / 77109 00889 E-mail: acplmumbai.sales@avconcontrols.com	
NORTHERN	
New Delhi Unit No. 708, 7th Floor, 94 Meghdoot, Nehru Place, New Delhi - 110019 Tel.No.: 011-42639736 / 88282 69844 E-mail: acplmumbai.sales@avconcontrols.com	

avcon[®]
Manufactured by:

AVCON CONTROLS PVT. LTD.

Plot No. 65, Road No.13, MIDC Marol, Andheri (East), Mumbai - 400 093 (INDIA).
Phone : +91-22-6915 6100.

E-mail : avcon@avconcontrols.com
acplmumbai.sales@avconcontrols.com
Website : www.avconcontrols.com